
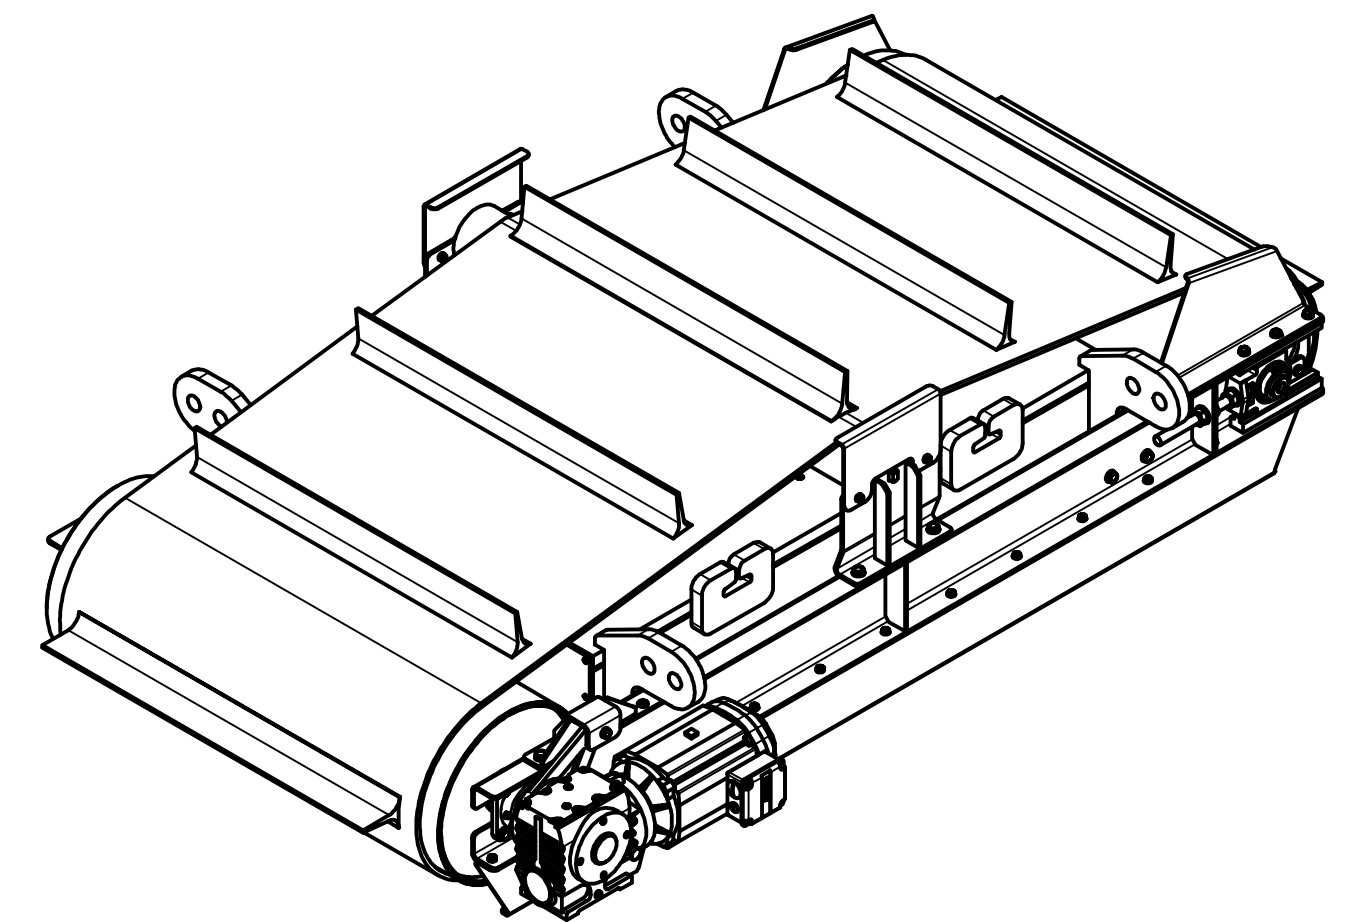
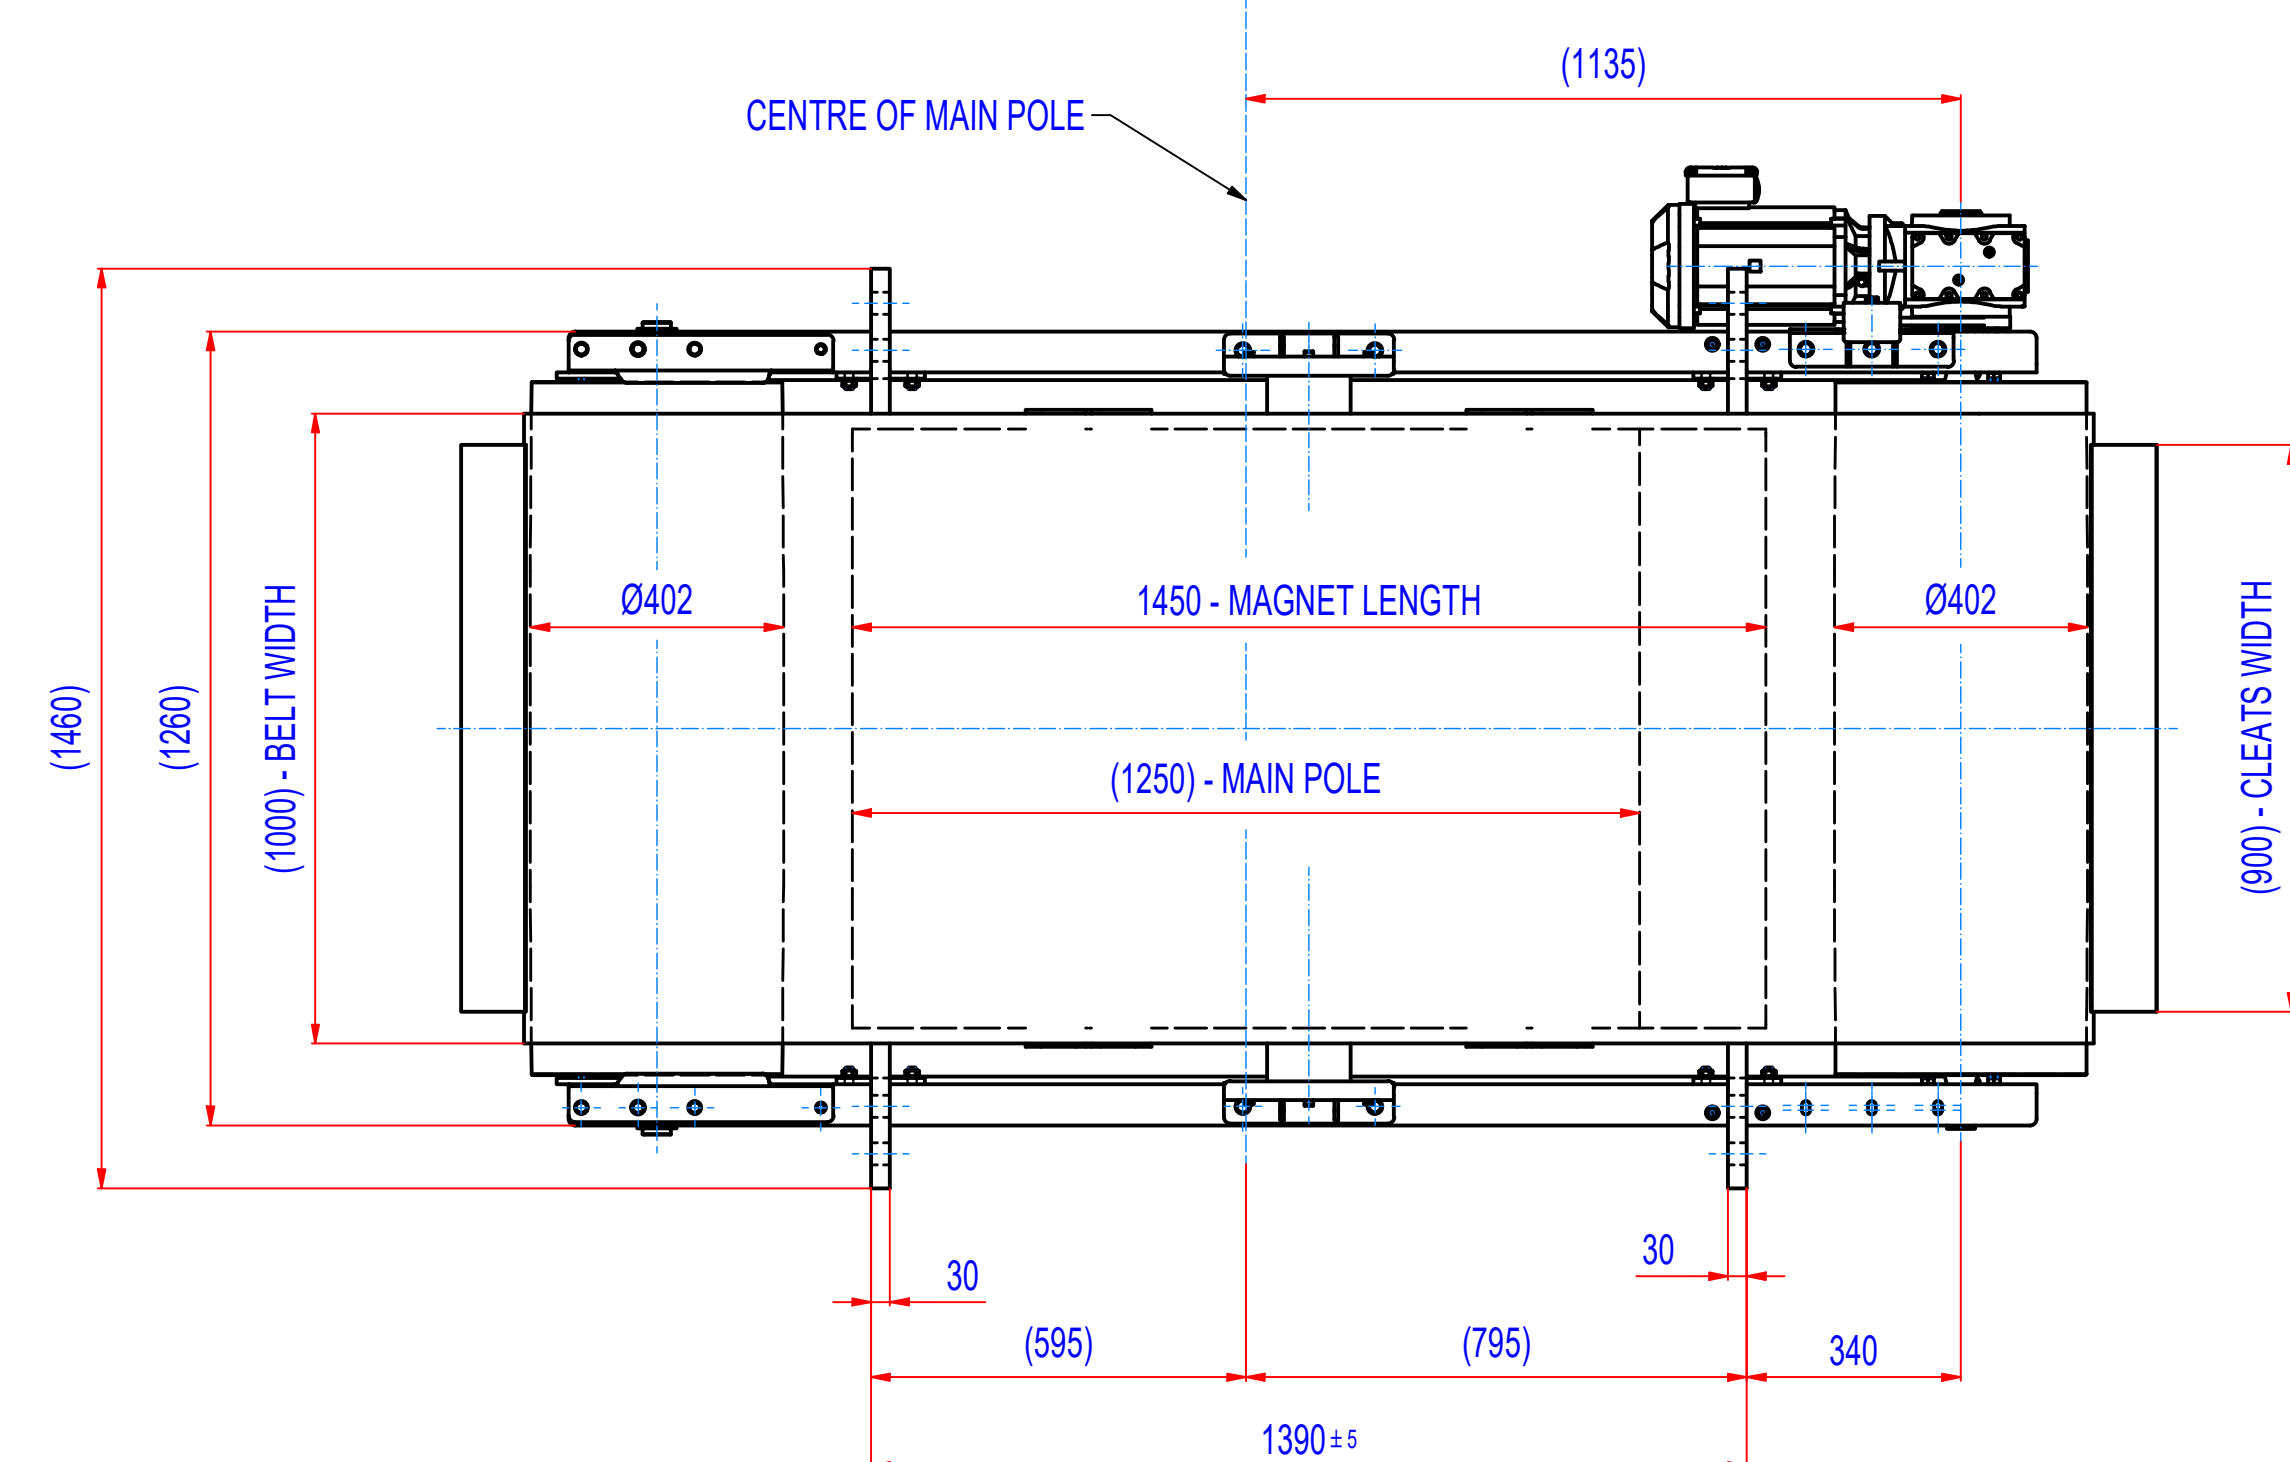
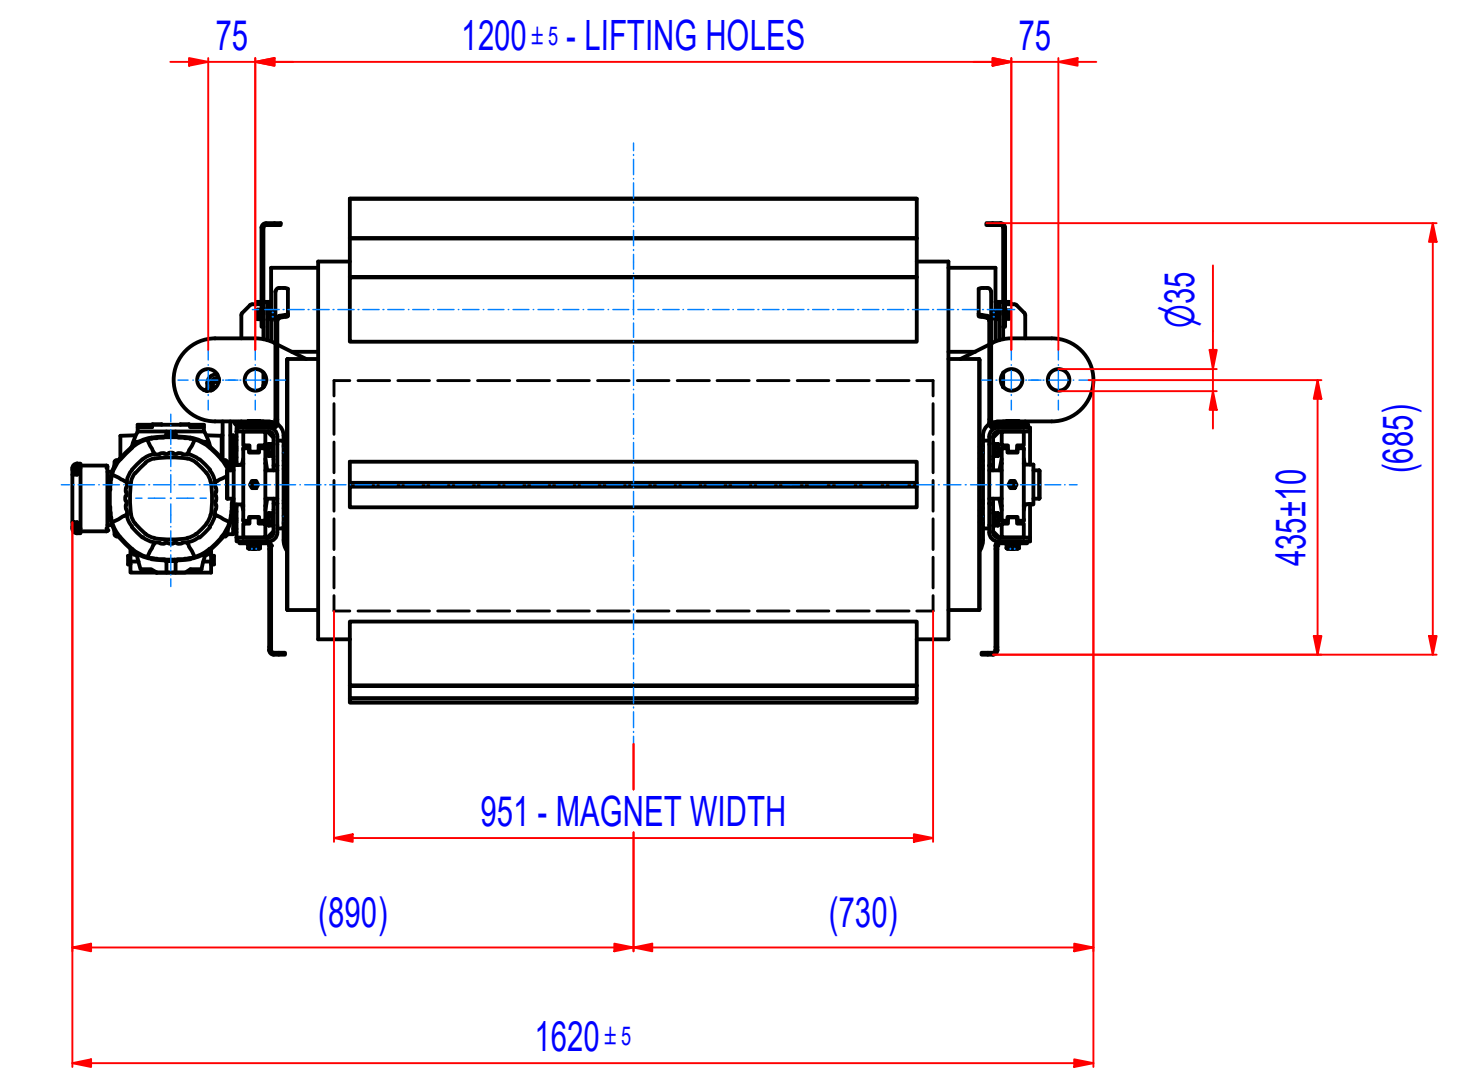


REV	BY	DATE	DESCRIPTION
	PW	14.12.2017	New Vault, nothing changed
A	LF	26.03.2022	MOTOR IP55 (WAS IP54)

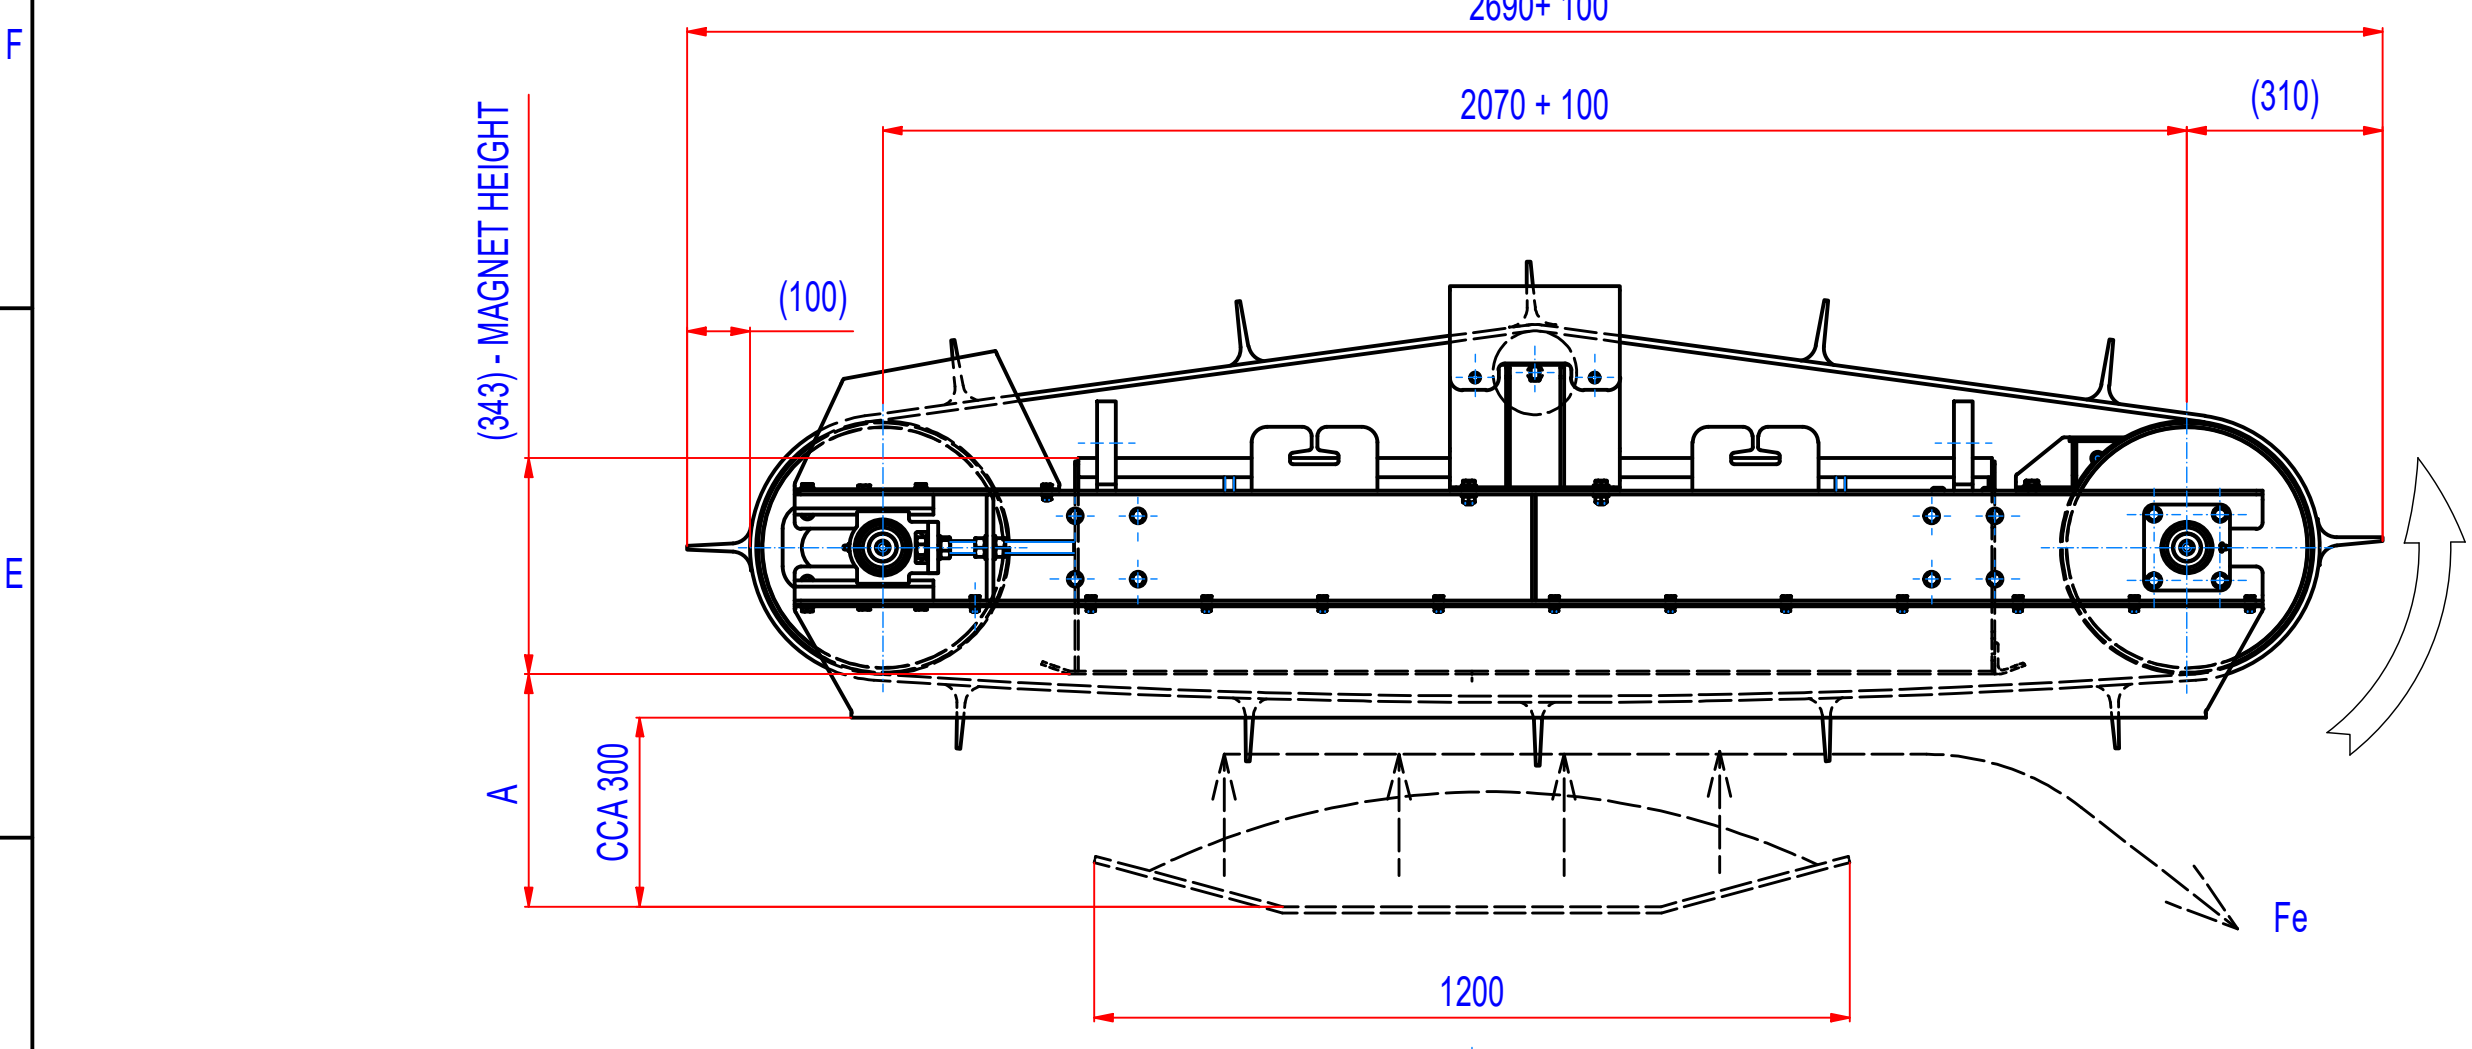

A = 430 mm - max. catch distance for rod Ø15, L=75 mm (VDE)
A = 370 mm - 400 Gs

- GEARED BOX SEW SA67/TDRN100L4, i=20,37 (71RPM),
MOTOR 230/400V, 3kW, 50Hz, IP55
- DRUM SPEED 71/min
- BELT SPEED 1,5m/s
- BELT EP500/4 5+2, LENGTH 5460, WIDTH 1000,
12 CLEATS T100/10, WIDTH 900

Sheet: A2	Extra info:	General tolerance: ISO 2768 - cL
Drawn: PW	Weight (kg): 2498 kg	Drawn according: ISO268; ISO1101; ISO2553
Date: 14.12.2017		Status:
Predecessor: SEPB120035		Customer reference number:
Quick search: XSPB 5		Product key: ROP-F5-C-120-W-G-L-B-B-NA
Description: Overband separator, Ferrite, Size 5, W1200, Cross	© All rights reserved. Reproduction is not permitted without written permission of GOUDSMIT Magnetic Systems BV	Part number: ROFC120350
		Rev: A